

# FLAX EVO P 30 FSE

## Technical Sheet


### 12" shallow subwoofer



## SPECIFICATIONS

<b>Nominal power</b>	300W RMS	
<b>Maximum power</b>	600W	
<b>Sensitivity (2.83V/1m)</b>	89dB	
<b>Cone</b>	Flax	
<b>Nom. impedance</b>	4Ω	
<b>Surround</b>	Butyl	
<b>DC resistance</b>	3.2 Ω	
<b>VC diameter</b>	38mm	1 1/2"
<b>Former</b>	Glass fiber	
<b>Layers</b>	4	
<b>Wire</b>	Copper	
<b>Net weight</b>	4.2kg	9.26lbs

## FREQUENCY RESPONSE/IMPEDANCE

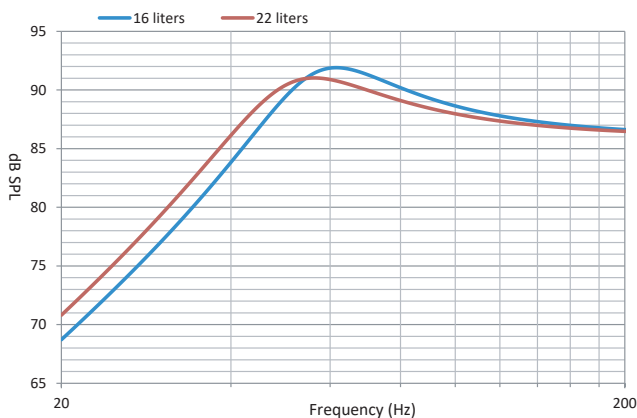

## PARAMETERS

<b>Rdc</b>	3.2Ω	
<b>Fs</b>	30Hz	
<b>Mms</b>	220g	
<b>Cms</b>	0.12mm/N	
<b>Vas</b>	42 l	
<b>Qts</b>	1.1	
<b>Ges</b>	1.3	
<b>Qms</b>	7.2	
<b>Bxl</b>	10.2N/A	
<b>Sd</b>	510cm <sup>2</sup>	
<b>SPL</b>	86dB	
<b>Xmax</b>	11mm	3/8"

## MECHANICAL DRAWING (MM)

