

K2 POWER SUB 25 KXE

Technical Sheet


Subwoofer 10"



SPECIFICATIONS

Nominal power	600W RMS
Maximum power	1,200W
Sensitivity (2.83V/1m)	84.5dB
Cone	K2 Sandwich
Surround	Butyl
Nom. impedance	4+4Ω
DC resistance	3.2+3.2Ω
VC diameter	65mm $2\frac{1}{2}''$
Former	Glass fiber
Layers	4
Wire	CCAW
Net weight	10.6kg 23.4lbs
Driver displacement	3l 0.1 cu.ft.

FREQUENCY RESPONSE/IMPEDANCE

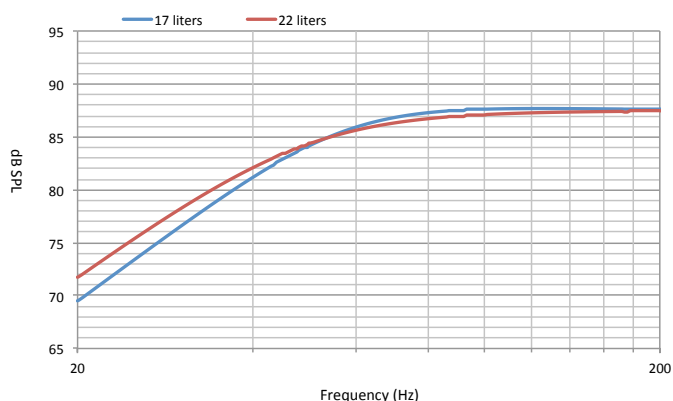

PARAMETERS

Rdc	3.2+3.2Ω
Fs	38Hz
Mms	163g
Cms	0.12mm/N
Vas	20l
Qts	0.52
Qes	0.58
Qms	5
Bxl	21.5N/A
Sd	327cm ²
SPL	84.5dB
Xmax	22.5mm

MECHANICAL DRAWING (MM)

